




LINGATEC SOLUÇÃO EM MOVIMENTAÇÃO DE CARGAS LTDA
Rua Danilo Valbuza, 600 - Laranjeiras - CAIEIRAS/SP - CEP: 07747-300
11-4441-5420 - vendas@lingatec.com.br - www.lingatec.com.br





Green Pin® Open Spelter Socket CP

Open spelter socket with cotter pin

Scan for
additional
product
details

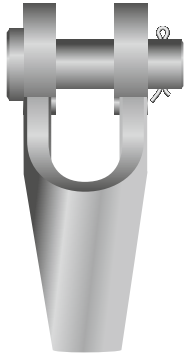

G-6412

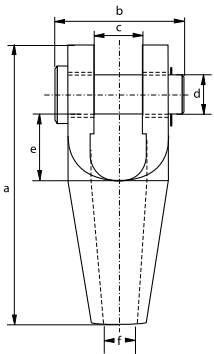

- **Material:** high tensile steel, quenched and tempered
- **Finish:** hot dipped galvanized
- **Temperature Range:** -20 °C up to +200 °C
- **Certification:** 2.1 2.2 3.1 CE IIA
- **Article code:** scan QR code to see article codes

number	minimum breaking load	diameter wire rope	length	width	width inside	diameter pin	length inside	opening	weight pin	weight each
	t	mm	a mm	b mm	c mm	d mm	e mm	f mm	kg	kg
196	8	6 - 7	109	51	19	16	33	9	0.9	0.47
197	12	8 - 10	124	62	21	21	34	12	0.17	0.71
198	20	11 - 13	143	66	26	25	37	15	0.26	1.04
199	25	14 - 16	172	82	33	30	49	18	0.47	1.83
100	45	18 - 19	205	95	38	35	58	21	0.74	3.09
104	60	20 - 22	235	110	44	41	68	24	1.19	4.68
108	85	23 - 26	275	130	51	51	75	28	2.15	8.35
111	105	27 - 30	306	144	57	57	85	32	2.95	11.4
115	136	31 - 36	338	155	63	64	95	38	4.02	15.5
118	150	37 - 39	394	178	76	70	127	41	5.54	23.2
120	170	40 - 42	418	187	76	76	127	44	6.89	27.4
125	225	43 - 48	468	213	89	89	133	51	10.6	42.4
128	280	49 - 54	552	240	101	95	180	57	13.7	63.9
130	360	55 - 60	598	270	113	108	196	63	19.9	91.1
132	425	61 - 68	654	303	127	121	212	73	28.1	127
135	460	69 - 75	696	349	133	127	215	79	35.6	164
138	560	76 - 80	737	371	146	133	219	86	41.5	199
140	625	81 - 86	788	391	159	140	228	92	48.5	235
142	720	87 - 93	852	411	171	152	242	99	59.8	294
144	875	94 - 102	914	447	191	178	254	108	89	393
146	1200	108 - 115	1160	489	206	193	368	125	114	642