



LINGATEC SOLUÇÃO EM MOVIMENTAÇÃO DE CARGAS LTDA
 Rua Danilo Valbuza, 600 - Laranjeiras - CAIEIRAS/SP - CEP: 07747-300
 11-4441-5420 - vendas@lingatec.com.br - www.lingatec.com.br



Green Pin® Open Wedge Socket CP



Open wedge socket with cotter pin

- **Material:** high tensile steel, quenched and tempered
- **Standard:** generally to EN 13411-6
- **Finish:** hot dipped galvanized
- **Temperature Range:** -20 °C up to +200 °C
- **Certification:** 2.1 2.2 3.1 CE IIA
- **Article code:** scan QR code to see article codes

Scan for
additional
product
details



G-6413

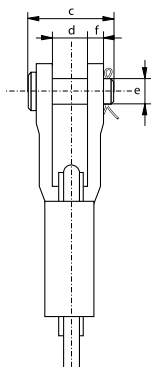

number	minimum breaking load	diameter wire rope	length	length to center pin	width	width inside	diameter pin	thickness side plates	diameter eye	weight pin	weight each
	t	mm	a mm	b mm	c mm	d mm	e mm	f mm	g mm	kg	kg
0.25	8	7 - 8	128	110	51	18	16	9	36	0.09	0.83
0.5	12	9 - 10	165	142	62	20.5	21	11	46	0.17	1.58
1	20	11 - 13	175	146	66	25	25	12	57	0.26	2.50
2	25	14 - 16	211	176	82	31	30	15	70	0.47	4.42
3	40	18 - 19	252	212	95	38	35	16	80	0.74	7.76
4	55	20 - 22	288	240	110	44	41	19	95	1.19	11.3
5	75	24 - 26	329	274	130	51	51	22	110	2.16	16.5
6	90	27 - 29	375	310	144	57	57	25	130	2.95	21.8
7	110	30 - 32	423	350	155	63	64	28	146	4.02	31
8	125	34 - 36	474	400	163	69	64	28	148	4.22	39.6
9	150	37 - 39	527	450	178	76	70	30	153	5.54	49.4
10	170	40 - 42	580	500	187	76	76	33	160	6.88	68.1
11	225	43 - 48	650	550	213	89	89	39	186	10.6	94.1