



G-6422

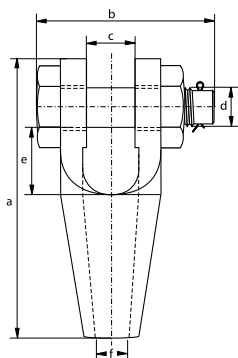

Green Pin® Open Spelter Socket BN

Open spelter socket with safety bolt

- **Material:** high tensile steel, quenched and tempered
- **Finish:** hot dipped galvanized
- **Temperature Range:** -20 °C up to +200 °C
- **Certification:** 2.1 2.2 3.1 CE IIA
- **Article code:** scan QR code to see article codes

Scan for
additional
product
details



number	minimum breaking load	diameter wire rope	length	width	width inside	diameter pin	length inside	opening	weight pin	weight each
	t	mm	a mm	b mm	c mm	d mm	e mm	f mm	kg	kg
196	8	6 - 7	109	69	19	16	33	9	0.15	0.53
197	12	8 - 10	124	83	21	20	35	12	0.32	0.86
198	20	11 - 13	143	101	26	25	37	15	0.61	1.40
199	25	14 - 16	172	124	33	30	49	18	1.08	2.43
100	45	18 - 19	205	138	38	35	58	21	1.59	3.93
104	60	20 - 22	235	148	44	41	68	24	2.3	5.74
108	85	23 - 26	275	176	51	50	76	28	4.06	10.3
111	105	27 - 30	306	193	57	57	85	32	5.51	14.0
115	136	31 - 36	338	210	63	63	95	38	7.44	18.9
118	150	37 - 39	394	230	76	70	127	41	9.40	27.1
120	170	40 - 42	418	244	76	77	126	44	12.1	32.7

In inch

number	minimum breaking load	diameter wire rope	length	width	width inside	diameter pin	length inside	opening	weight each
	t	inch	a inch	b inch	c inch	d inch	e inch	f inch	lbs
196	8	1/4	4 9/32	2 23/32	3/4	5/8	1 5/16	11/32	0.88
197	12	3/8	4 7/8	3 9/32	13/16	25/32	1 3/8	15/32	1.76
198	20	7/16 - 1/2	5 5/8	3 31/32	1 1/32	1	1 1/2	19/32	2.87
199	25	9/16 - 5/8	6 3/4	4 7/8	1 5/16	1 3/16	1 15/16	23/32	5.07
100	40	3/4	8 3/32	5 7/16	1 17/32	1 3/8	2 9/32	13/16	8.16
104	55	7/8	9 9/32	5 13/16	1 3/4	1 5/8	2 11/16	15/16	10.14
108	75	1	10 13/16	6 29/32	2	1 31/32	3	1 1/8	21.38
111	90	1 1/8	12 1/32	7 19/32	2 1/4	2 1/4	3 11/32	1 9/32	30.0
115	125	1 1/4 - 1 3/8	13 5/16	8 9/32	2 1/2	2 1/2	3 25/32	1 17/32	35.3
118	150	1 1/2	15 17/32	9 3/32	3	2 3/4	5	1 5/8	59.3
120	170	1 5/8	16 1/2	9 5/8	3	3 1/32	4 15/16	1 3/4	70.5