



LINGATEC SOLUÇÃO EM MOVIMENTAÇÃO DE CARGAS LTDA
Rua Danilo Valbuza, 600 - Laranjeiras - CAIEIRAS/SP - CEP: 07747-300
11-4441-5420 - vendas@lingatec.com.br - www.lingatec.com.br




Green Pin® DNV Master Link Assembly



Grade 8 master link assembly

- **Material:** alloy steel, grade 8
- **Safety Factor:** MBL equals 5 x WLL
- **Standard:** DNV 2.7-1, EN 12079-2 and EN 1677-4
- **Finish:** painted silver
- **Temperature range:** -40 °C up to +200 °C
- **Certification:** 2.1 2.2 3.1 MTC^b MPI^b DNV 2.7-1^a CE IIB
- **Article code:** scan QR code to see article codes
- **Note:** size WLL 75 t and 100 t have a temperature range of -20 °C up to +200 °C

Scan for
additional
product
details

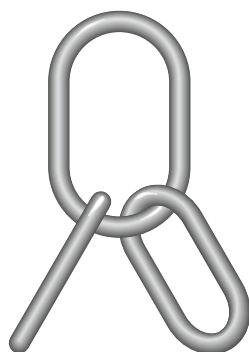

P-6820



working load limit	diameter	length inside	width inside	diameter	length inside	width inside	weight each
t	a mm	b mm	c mm	d mm	e mm	f mm	kg
4.1	16	150	75	14.5	125	60	1.62
7	22	270	140	22	162	90	5.22
9.3	26	270	140	22	162	90	6.05
14.5	28	270	140	22	162	90	6.73
19	32	270	140	28	200	110	10.9
26	36	270	140	28	200	110	12.4
30.5	40	280	155	32	270	140	18.5
40	45	320	175	36	270	140	25.1
51	50	350	195	45	320	175	40.9
75	65	410	220	50	350	195	66.1
100	75	450	250	65	410	220	115

CAD INFO

