




UCO

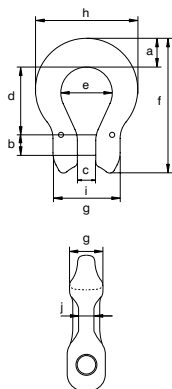

LINGATEC SOLUÇÃO EM MOVIMENTAÇÃO DE CARGAS LTDA
 Rua Danilo Valbuza, 600 - Laranjeiras - CAIEIRAS/SP - CEP: 07747-300
 11-4441-5420 - vendas@lingatec.com.br - www.lingatec.com.br

Green Pin® Omega Link GR10

Grade 10 omega link

- **Material:** alloy steel, grade 10, quenched and tempered
- **Safety factor:** MBL equals 4 x WLL
- **Standard:** follows the EN1677 with grade 10 values and conforms to ASTM A952/A952M
- **Finish:** painted blue
- **Temperature range:** -40 °C up to +200 °C
- **Certification:** 2.1 2.2 3.1 MTC[®] MPI[®] DGUV CE IIB
- **Article code:** scan QR code to see article codes

Scan for
additional
product
details



for chain diameter	working load limit	width	diameter pin	width	length inside	width bow	length outside	thickness	width outside	width outside	thickness	weight each
mm	t	a mm	b mm	c mm	d mm	e mm	f mm	g mm	h mm	i mm	j mm	kg
6	1.4	14	8	7	25	20	53	13	41	28	6	0.07
7	1.95	21	10	9	34	24	72	16	58	32	9	0.18
8	2.6	21	10	9	34	24	72	16	58	32	9	0.18
10	4	21	13	12	40	31	84	19	67	42	11	0.28
13	6.8	28	16	15	51	40	109	23	90	54	14	0.64
16	10.3	35	20	19	64	48	135	27	110	68	17	1.21

CAD INFO