


G-2169



- Quenched & Tempered for maximum strength.
- Forged alloy steel.
- Available in galvanized finish.
- Can be individually proof tested and magnetic particle inspected upon request. Crosby certification available at time of order.
- Meets or exceeds all requirements of ASME B30.26 including identification, ductility, design factor, proof load and temperature requirements. Importantly, these shackles meet other critical performance requirements including fatigue life, impact properties and material traceability, not addressed by ASME B30.26.
- Look for the Red Pin®... the mark of genuine Crosby quality.

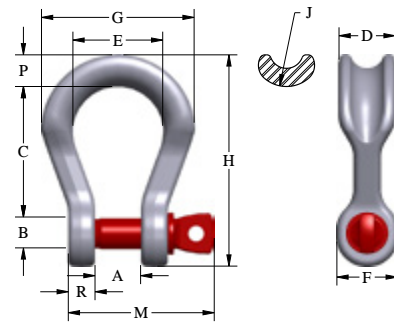

G-2169 Alloy Screw Pin Wide Body Shackles

Load Rated

QT
QUENCHED & TEMPEREDAPPLICATION AND WARNING INFORMATION
SECTION 17

Working Load Limit (t)	Stock No.	Weight Each (lb)	Dimensions (in)														Replacement Screw Pin Stock No.
			A	B +/- .25	C	D +/- .02	E	F	G	H	J	K	L	M	P	R	
7	1021655	3.5	1.25	.88	3.56	1.60	2.50	1.82	4.10	5.87	1.25	1.25	.50	3.97	.96	.69	-
12 1/2	1021673	8.8	1.69	1.16	4.63	2.13	3.26	2.38	5.51	7.63	1.37	1.63	.56	5.13	1.25	.92	-
18	1021691	13	2.03	1.41	5.81	2.50	4.00	2.69	6.76	9.38	1.50	2.00	.69	6.25	1.41	1.16	1083873

5:1 Design Factor. Proof Load is 2 times the Working Load Limit.



LINGATEC SOLUÇÃO EM MOVIMENTAÇÃO DE CARGAS LTDA
 Rua Danilo Valbuza, 600 - Laranjeiras - CAIEIRAS/SP - CEP: 07747-300
 11-4441-5420 - vendas@lingatec.com.br - www.lingatec.com.br