

Chain GrabiQ Grade 10 (400)

Short link, KL

Heat treatment


Quenched and tempered.
Note! For chain grade 10 (400) the maximum in service temperature is 400°C.

Surface treatment

Painted blue

Marking

8+

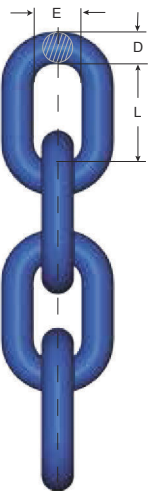

Art. no. Box	Code	WLL tonnes	D nom. mm	L » mm	E » mm	Weight kgs/m	MPF kN	Breaking force kN
Z802306 - 1 x 200 m	KLA 6-10 (400)	1.5	6.6	18	8.9	1.0	35.4	56.5
Z802307 - 1 x 200 m	KLA 8-10 (400)	2.5	8.8	24	11.2	1.7	63	102
Z802308 - 1 x 100 m	KLA 10-10 (400)	4.0	11.0	30	14.4	2.6	98	158
Z802309 - 1 x 100 m	KLA 13-10 (400)	6.7	14.3	39	19.2	4.5	166	268
Z802310 - 1 x 100 m	KLA 16-10 (400)	10.0	17.3	48	23.0	6.7	251	402

For larger sizes, see Classic Grade 8

Marking and Traceability of Gunnebo Industries Chain

