



Chain, GrabiQ Grade 10 (200)

Short link, KL

Heat treatment

Quenched and tempered.

Note! For chain grade 10 (200) the maximum in service temperature is 200°C.


Surface treatment

Painted blue

Fulfills the requirements in:

ASTM A973/A973M-07(2012)
 EN 818-2:2008 (WLL +25%,
 reduced temperature range)

Art. no. Box	Code	WLL tonnes	d nom. mm	P» mm	w1» mm	Weight kgs/m	MPF kN	Breaking force kN
Z802300 - 1 x 200 m	KLA 6-10 (200)	1.5	6	18	8.5	0.8	36.8	58.9
Z802337 - 1 x 200 m	KLA 7-10 (200)	1.95	7	21	10.0	1.1	48	77
Z802301 - 1 x 200 m	KLA 8-10 (200)	2.6	8	24	11.0	1.4	63	102
Z802302 - 1 x 100 m	KLA 10-10 (200)	4.0	10	30	14.0	2.3	98	158
Z802303 - 1 x 100 m	KLA 13-10 (200)	6.8	13	39	17.7	3.8	166	268
Z802304 - 1 x 100 m	KLA 16-10 (200)	10.3	16	48	21.9	5.6	251	402
Z802305 - 1 x 50 m	KLA 20-10 (200)	16.0	20	60	27.0	9.4	393	630
Z802246 - 1 x 50 m	KLA 22-10 (200)	20.0	22	66	29.0	11.9	491	785
Z802248 - 1 x 50 m	KLA 26-10 (200)	27.0	26	78	35.0	16.4	664	1062
Z802440 - 1 x 25 m	KLA 32-10 (200)	40.0	32	96	41.6	25.8	981	1610

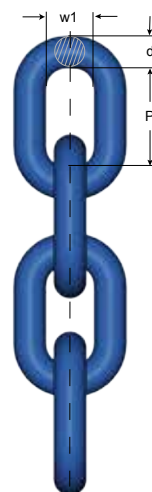

Marking and Traceability of Gunnebo Industries Chain

