





LINGATEC SOLUÇÃO EM MOVIMENTAÇÃO DE CARGAS LTDA
 Rua Danilo Valbuza, 600 - Laranjeiras – CAIEIRAS/SP – CEP: 07747-300
 11-4441-5420 - vendas@lingatec.com.br - www.lingatec.com.br

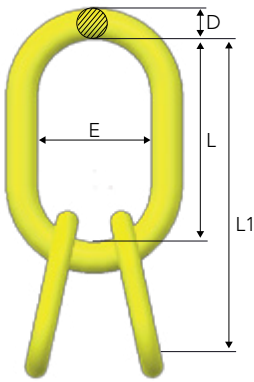

- Made from Quenched & Tempered, Fine Grain Alloy Steel from European Steel Mills.
- Links are individually Proof Tested to values shown, with certification.
- Proof Test with max 60% inside width fixture to prevent localized point loading per ASTM A952.
- Each link is marked with Product Identification Code (PIC) for traceability, Grade, chain size, SWE, GUNNEBO and BG/DGUV manufacturing ID (H32).
- Fatigue rated to at least 20,000 cycles at 1.5 times the Working Load Limit.
- Designed for use with chain, wire or synthetic rope. Applications with wire and synthetic rope generally require a 5:1 Design Factor.
- Engineered Flat on sub links up to MT-16-10.
- Fulfills or exceeds requirements in EN1677:2008, ASTM A952/A952M-02, AS 3775:2014 and AS 3776:2015.

Grade 100 Welded Master Link Assembly MT

Designed for use with chain or wire rope. For 3 and 4-leg slings

Stock No.	Code	WLL (t)	Proof Load (t)	Grade 100 Chain Size 3/4-leg (mm)	Grade 80 Chain Size 3/4-leg (mm)	Dimensions (mm)								Weight (kg)
						L1	L	E	D	I	e	d	G*	
Z200600	MT-6-10	4.3	10.7	6, 7	6, 7	260	140	80	17	120	60	13	6	1.5
Z200800	MT-8-10	7.8	19.5	8	8, 10	300	160	95	22	140	80	17	8	3.0
Z201000	MT-10-10	12	30.0	10	13	435	275	145	28	160	95	22	10	6.8
Z201300	MT-13-10	21	52.5	13	16	465	275	145	32	190	110	28	13	10.9
Z201600	MT-16-10	31	77.5	16	19, 20	545	270	140	40	275	145	32	16	18.4
Z202000	MT-20-10	48	120.0	20	22	610	340	180	45	270	140	40	20	29.1
Z202200	MT-22-10	60	150.1	22	26	690	350	200	55	340	180	45	-	46.4
Z202600	MT-26-10	85	212.5	26	32	725	375	210	60	350	200	55	-	67.6
Z203200	MT-32-10	125	312.5	32	-	825	450	260	80	375	210	60	-	110.1

5:1 Design Factor. *Thickness of flat on sub link