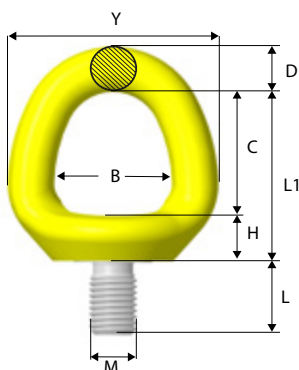


Rotating Eye Lifting Point RELP



Stock No.	Code	Dimensions (in)										Weight (lb)
		B	C	D	E	H	L	L1	M	Y	Z	
Z102408	RELP-M8 x 1.25	1.1	1.10	0.43	1.57	0.55	0.59	1.65	0.31	1.96	1.14	0.44
Z102410	RELP-M10 x 1.5	1.1	1.10	0.43	1.57	0.55	0.59	1.65	0.39	1.96	1.14	0.44
Z102412	RELP-M12 x 1.75	1.26	1.29	0.51	1.81	0.51	0.78	1.85	0.47	2.28	1.49	0.66
Z102416	RELP-M16 x 2	1.54	1.61	0.59	2.09	0.62	0.94	2.24	0.62	2.75	1.57	1.10
Z102420	RELP-M20 x 2.5	1.65	1.69	0.63	2.36	0.70	1.18	2.36	0.78	3.07	1.81	1.54
Z102424	RELP-M24 x 3	1.97	2.00	0.75	2.68	0.78	1.41	2.79	0.94	3.46	1.73	2.42
Z102430	RELP-M30 x 3.5	2.36	2.44	1.02	3.35	1.10	1.77	3.54	1.18	4.40	2.51	5.29
Z102436	RELP-M36 x 4	2.83	2.83	1.26	3.82	1.25	2.12	4.09	1.41	5.35	2.91	9.03
Z102442	RELP-M42 x 4.5	3.23	3.22	1.5	4.72	1.45	2.48	4.68	1.65	6.22	3.58	14.7
Z102448	RELP-M48 x 5	3.7	3.77	1.69	5.59	1.53	2.83	5.31	1.88	7.08	4.01	21.8

Bolt according to: ISO 898-1 Class 10.9



RELP with UNC thread



Stock No.	Code	Dimensions (in)										Weight (lb)
		B	C	D	E	H	L	L1	Y	Z	M	
Z102508	RELP 5/16"-18 UNC	1.10	1.10	0.43	1.57	0.55	0.59	1.65	1.96	1.14	5/16"	0.44
Z102510	RELP 3/8"-16 UNC	1.10	1.10	0.43	1.57	0.55	0.59	1.65	1.96	1.14	3/8"	0.44
Z102512	RELP 1/2"-13 UNC	1.25	1.29	0.51	1.81	0.51	0.78	1.85	2.28	1.49	1/2"	0.66
Z102516	RELP 5/8"-11 UNC	1.53	1.61	0.59	2.08	0.62	0.94	2.24	2.75	1.57	5/8"	1.10
Z102520	RELP 3/4"-10 UNC	1.65	1.69	0.62	2.36	0.70	1.18	2.36	3.07	1.81	3/4"	1.54
Z102521	RELP 7/8"-9 UNC	1.65	1.69	0.62	2.36	0.70	1.18	2.36	3.07	1.81	7/8"	1.54
Z102524	RELP 1"-8 UNC	1.96	2.00	0.74	2.67	0.78	1.41	2.79	3.46	1.73	1"	2.42
Z102530	RELP 1 1/4"-7 UNC	2.36	2.44	1.02	3.34	1.10	1.77	3.54	4.40	2.51	1 1/4"	5.29
Z102536	RELP 1 1/2"-6 UNC	2.83	2.83	1.25	3.81	1.25	2.12	4.09	5.35	2.91	1 1/2"	9.03
Z102542	RELP 1 3/4"-5 UNC	3.22	3.22	1.49	4.72	1.45	2.48	4.68	6.22	3.58	1 3/4"	14.9
Z102548	RELP 2"-4.5 UNC	3.70	3.77	1.69	5.59	1.53	2.83	5.31	7.08	4.01	2"	22.0

Bolt according to: ISO 898-1 Class 10.9

Working Load Limits - RELP 4:1 Design Factor.

Symmetric Load (lb)										
	No. of Legs	1	1	2	2	2 symmetric		3 & 4 symmetric		
Angle β	0°	90°	0°	90°	45°	30°	45°	30°	Tightening Torque	Allen Key
RELP -M8 x 1.25	1543	661	3086	1322	882	661	1322	882	10 Nm	8 mm
RELP 5/16"-18 UNC	1543	661	3086	1322	882	661	1322	882	7Ft.Lbs	5/16" UNC
RELP-M10x1,5	2645	1102	5290	2204	1543	1102	2204	1543	15 Nm	8 mm
RELP 3/8"-16 UNC	2645	1102	5290	2204	1543	1102	2204	1543	11Ft.Lbs	5/16" UNC
RELP - M12x1,75	4408	1763	8816	3526	2424	1763	3526	2645	27 Nm	8 mm
RELP 1/2"-13 UNC	4408	1763	8816	3526	2424	1763	3526	2645	20Ft.Lbs	5/16" UNC
RELP - M16x2	7714	3306	15428	6612	4628	3306	6832	4849	60 Nm	8 mm
RELP 5/8"-11 UNC	7714	3306	15428	6612	4628	3306	6832	4849	44Ft.Lbs	5/16" UNC
RELP - M20x2,5	13444	5290	26889	10579	7273	5290	11020	7934	90 Nm	19 mm
RELP 3/4"-10 UNC	11020	5069	22040	10138	6832	5069	10579	7494	66Ft.Lbs	3/4" UNC
RELP 7/8"-9 UNC	13444	6392	26889	12783	8948	6392	13422	9477	66Ft.Lbs	3/4" UNC
RELP - M24x3	17852	7273	35705	14546	10138	7273	15208	10800	135 Nm	19 mm
RELP 1"-8 UNC	17852	7273	35705	14546	10138	7273	15208	10800	100Ft.Lbs	3/4" UNC
RELP - M30x3,5	26668	10138	53337	20277	14106	10138	21158	15208	270 Nm	19 mm
RELP 1 1/4"-7 UNC	26668	10138	53337	20277	14106	10138	21158	15208	200Ft.Lbs	3/4" UNC
RELP - M36x4	35484	15648	70969	31297	21820	15648	32840	23362	320 Nm	19 mm
RELP 1 1/2"-6 UNC	35484	15648	70969	31297	21820	15648	32840	23362	236Ft.Lbs	3/4" UNC
RELP - M42x4,5	52896	20056	105792	40113	28079	20056	42118	29974	600 Nm	19 mm
RELP 1 3/4"-5 UNC	52896	20056	105792	40113	28079	20056	42118	29974	440Ft.Lbs	3/4" UNC
RELP - M48x5	70528	26668	141056	53337	37336	26668	56004	39892	800 Nm	19 mm
RELP 2"-4,5 UNC	70528	26668	141056	53337	37336	26668	56004	39892	590Ft.Lbs	3/4" UNC