




FORGED ROV EYE HOOKS

ROV eye forged single chain hook based on DIN7540 design

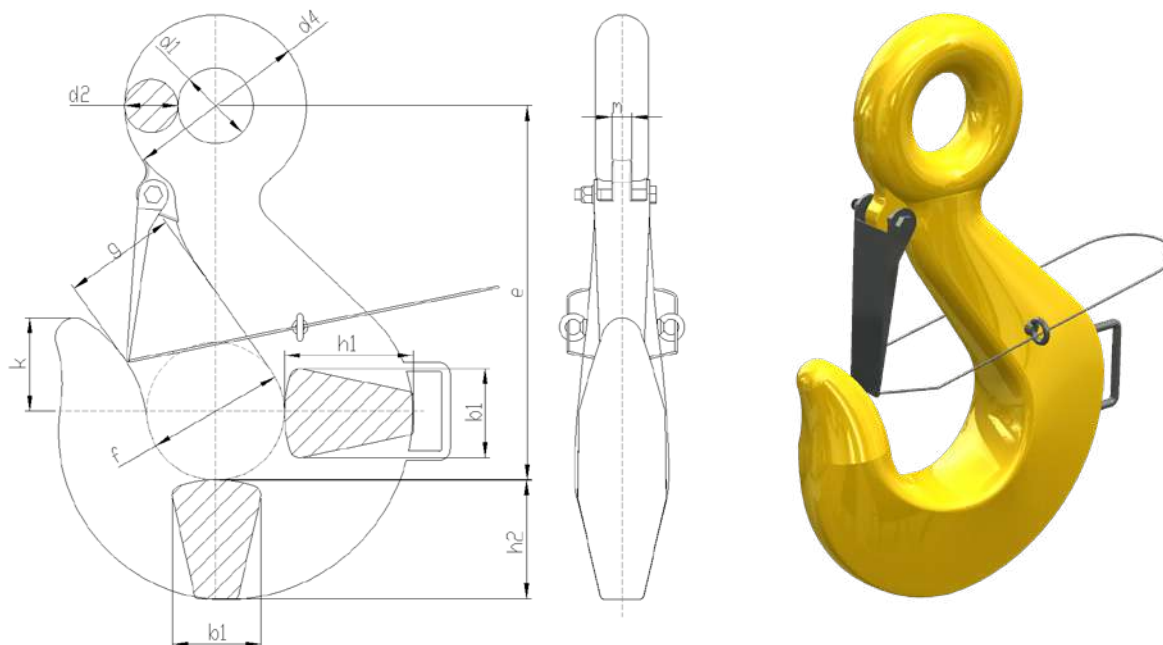

- WLL: from 5t to 400t.
- Hook forged and heat treated. Guaranteed grain orienting.
- Material: carbon, alloys and super alloys.
- Surface Protection & Coatings: upon request
- Safety Factor: min. 4:1 with the highest material grade.
- Load Test: requested / recommended. IL0-3, FAT or Breaking Test upon request.
- Certificate: EN10204-3.1. For 3.2, Mooring Accessory Cert (R4) with ABS and DNV upon request.

ROV EYE FORGED SINGLE CHAIN HOOK BASED ON DIN7540 DESIGN

Overall dimensions (mm)													Weight
No	WLL (t)	b1	d1	d2	e	f	g	h1	h2	k	m	d4	kg
34	40	78	114	51	460	140	109	118	103	80	20	216	35
35	50	89	130	50,5	520	158	124	135	116	90	23	231	51
36	63	99	144	64	548	176	138	151	130	101	25	272	68
37	80	110	102	63	610	198	155	168	145	113	30	228	80
38	100	125	116	74	650	225	175	195	172	133	38	264	125
39	150	160	130	86	765	250	200	225	199	160	38	302	250
40	200	180	150	102	850	275	225	260	237	195	45	354	365
41	250	200	170	120	928	310	255	290	269	210	45	410	515
42	300	220	190	140	1052	350	290	330	309,5	240	45	470	730
43	400	240	210	170	1195	400	320	380	345	270	45	550	1055

Smaller sizes upon request.

WLL working load limit using R4 material.

Forging tolerances +/-5%.