





**LINGATEC SOLUÇÃO EM MOVIMENTAÇÃO DE CARGAS LTDA**  
 Rua Danilo Valbuza, 600 - Laranjeiras - CAIEIRAS/SP - CEP: 07747-300  
 11-4441-5420 - vendas@lingatec.com.br - www.lingatec.com.br

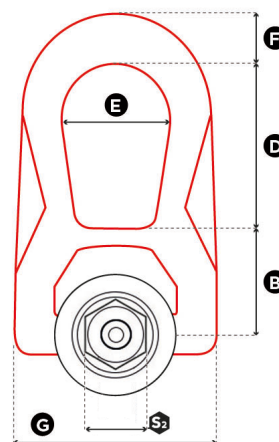

**QLR**  
 Quick Lift Ring

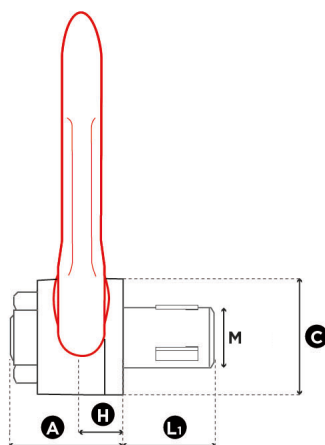

1 in = 25.4 mm

| Reference   | Diameter     | SF 5:1<br>WLL<br>(t) | Standard<br>L <sub>1</sub><br>(mm) | Torque<br>(Nm) | S <sub>2</sub><br>(mm) | A<br>(mm) | B<br>(mm) | C<br>(mm) | D<br>(mm) | E<br>(mm) | F<br>(mm) | G<br>(mm) | H<br>(mm) | Weight<br>(kg) |
|-------------|--------------|----------------------|------------------------------------|----------------|------------------------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|----------------|
| QL.DSR M 8  | M 8 (x1,25)  | 0,25                 | 17,5                               | 20             | 18                     | 31        | 30        | 30        | 38        | 27        | 14        | 53        | 9,5       | 0,3            |
| QL.DSR M 10 | M 10 (x1,5)  | 0,40                 | 19,5                               | 30             | 18                     | 31        | 30        | 30        | 38        | 27        | 14        | 53        | 9,5       | 0,3            |
| QL.DSR M 12 | M 12 (x1,75) | 0,65                 | 23                                 | 60             | 27                     | 40        | 40        | 45        | 53        | 38        | 17        | 76        | 13        | 0,9            |
| QL.DSR M 14 | M 14 (x2)    | 0,70                 | 23                                 | 80             | 27                     | 40        | 40        | 45        | 53        | 38        | 17        | 76        | 13        | 0,9            |
| QL.DSR M 16 | M 16 (x2)    | 1,05                 | 27                                 | 100            | 27                     | 40        | 40        | 45        | 53        | 38        | 17        | 76        | 13        | 0,9            |
| QL.DSR M 20 | M 20 (x2,5)  | 1,70                 | 30                                 | 160            | 40                     | 55        | 55        | 60        | 83        | 55        | 25        | 115       | 19        | 2,6            |
| QL.DSR M 24 | M 24 (x3)    | 2,50                 | 36                                 | 180            | 40                     | 55        | 55        | 60        | 83        | 55        | 25        | 115       | 19        | 2,6            |
| QL.DSR M 27 | M27 (x3)     | 3,00*                | 40                                 | *              | 40                     | 55        | 55        | 60        | 83        | 55        | 25        | 115       | 19        | 2,7            |
| QL.DSR M 30 | M30 (x3,5)   | 3,50                 | 45                                 | 200            | 40                     | 55        | 55        | 60        | 83        | 55        | 25        | 115       | 19        | 2,7            |

\* In certification process / En cours d'homologation / In Entwicklungsphase / En proceso de homologación