



LINGATEC SOLUÇÃO EM MOVIMENTAÇÃO DE CARGAS LTDA
Rua Danilo Valbuza, 600 - Laranjeiras - CAIEIRAS/SP - CEP: 07747-300
11-4441-5420 - vendas@lingatec.com.br - www.lingatec.com.br



Green Pin® Open Long Wedge Socket CP



Open wedge socket with longer wedge, wire rope clip and cotter pin

- **Material:** high tensile steel
- **Standard:** generally to EN 13411-6
- **Finish:** hot dipped galvanized
- **Temperature Range:** -20 °C up to +200 °C
- **Certification:** 2.1 2.2 3.1 CE II A
- **Article code:** scan QR code to see article codes

Scan for
additional
product
details



G-6419

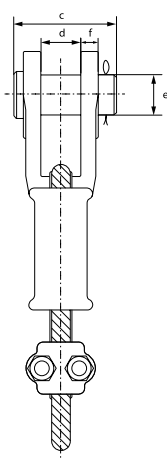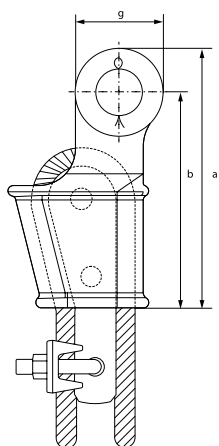

number	minimum breaking load	diameter wire rope	length	length to center pin	width	width inside	diameter pin	thickness side plates	diameter eye	weight pin	weight each
	t	mm	a mm	b mm	c mm	d mm	e mm	f mm	g mm	kg	kg
0.5	12	9 - 10	165	142	62	20.5	21	11	46	0.17	1.88
1	20	11 - 13	175	146	66	25	25	12	57	0.26	3.02
2	25	14 - 16	211	176	82	31	30	15	70	0.47	5.16
3	40	18 - 19	252	212	95	38	35	16	80	0.74	8.80
4	55	20 - 22	288	240	110	44	41	19	95	1.19	12.8
5	75	24 - 26	329	274	130	51	51	22	110	2.16	18.30
6	90	27 - 29	375	310	144	57	57	25	130	2.95	23.7
7	110	30 - 32	423	350	155	63	64	28	146	4.02	33.9