



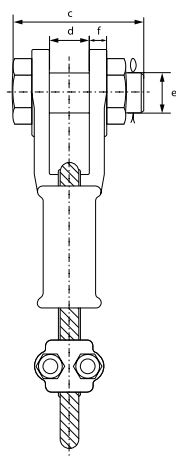

G-6429

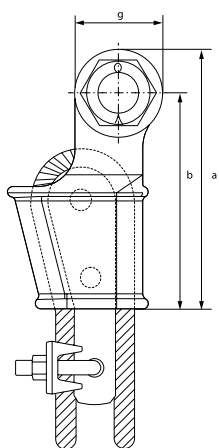

LINGATEC SOLUÇÃO EM MOVIMENTAÇÃO DE CARGAS LTDA
 Rua Danilo Valbuza, 600 - Laranjeiras - CAIEIRAS/SP - CEP: 07747-300
 11-4441-5420 - vendas@lingatec.com.br - www.lingatec.com.br

Green Pin® Open Long Wedge Socket BN

Open wedge socket with longer wedge, wire rope clip and safety bolt

- **Material:** high tensile steel
- **Standard:** generally to EN 13411-6
- **Finish:** hot dipped galvanized
- **Temperature Range:** -20 °C up to +200 °C
- **Certification:** 2.1 2.2 3.1 CE IIA
- **Article code:** scan QR code to see article codes

Scan for
additional
product
details



number	minimum breaking load	diameter wire rope	length	length to center pin	width	width inside	diameter pin	thickness side plates	diameter eye	weight pin	weight each
	t	mm	a mm	b mm	c mm	d mm	e mm	f mm	g mm	kg	kg
0.5	12	9 - 10	165	142	83	20.5	20	11	46	0.32	2.02
1	20	11 - 13	175	146	101	25	25	12	57	0.61	3.88
2	25	14 - 16	211	176	124	31	30	15	70	1.08	5.77
3	40	18 - 19	252	212	138	38	35	16	80	1.59	9.65
4	55	20 - 22	288	240	148	44	41	19	95	2.25	13.8
5	75	24 - 26	329	274	176	51	50	22	110	4.06	20.2
6	90	27 - 29	375	310	193	57	57	25	130	5.51	26.3
7	110	30 - 32	423	350	210	63	63	28	146	7.44	37.4