
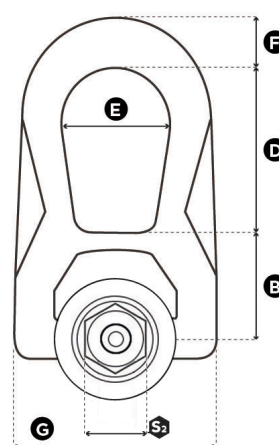


SS.QL.DSR**STAINLESS STEEL
QUICK LIFT DOUBLE SWIVEL RING****METRIC THREADS**

QLR
Quick Lift Ring

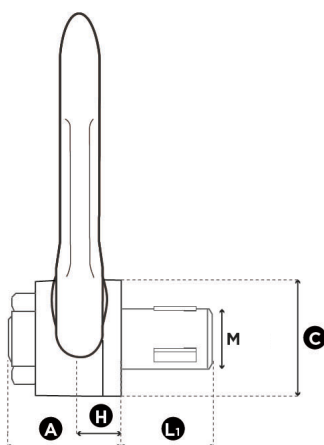

1 in = 25.4 mm

Reference	Diameter	SF 5:1 WLL (t)	Standard L ₁ (mm)	Torque (Nm)	S ₂ (mm)	A (mm)	B (mm)	C (mm)	D (mm)	E (mm)	F (mm)	G (mm)	H (mm)	Weight	
														(kg)	(lbs)
SS.QL.DSR M 8	M 8 (x1,25)	0,25	17,5	20	18	31	30	30	38	27	14	53	9,5	0,3	0.66
SS.QL.DSR M 10	M 10 (x1,5)	0,40	19.5	30	18	31	30	30	38	27	14	53	9.5	0,3	0.66
SS.QL.DSR M 12	M 12 (x1,75)	0,65	23	60	27	40	40	45	53	38	17	76	13	0,9	1.98
SS.QL.DSR M 14	M 14 (x2)	0,70	23	80	27	40	40	45	53	38	17	76	13	0,9	1.98
SS.QL.DSR M 16	M 16 (x2)	1,05	27	100	27	40	40	45	53	38	17	76	13	0,9	1.98
SS.QL.DSR M 20	M 20 (x2,5)	1,70	30	160	40	55	55	60	83	55	25	115	19	2,6	5.73
SS.QL.DSR M 24	M 24 (x3)	2,50	36	180	40	55	55	60	83	55	25	115	19	2,6	5.73

Reference	Diameter	SF 4:1 WLL (t)	Standard L ₁ (mm)	Torque (Nm)	S ₂ (mm)	A (mm)	B (mm)	C (mm)	D (mm)	E (mm)	F (mm)	G (mm)	H (mm)	Weight	
														(kg)	(lbs)
SS.QL.DSR M 30	M 30 (x3,5)	3,50	45	200	40	55	55	60	83	55	25	115	19	2,7	5.95



LINGATEC SOLUÇÃO EM MOVIMENTAÇÃO DE CARGAS LTDA
 Rua Danilo Valbuza, 600 - Laranjeiras - CAIEIRAS/SP - CEP: 07747-300
 11-4441-5420 - vendas@lingatec.com.br - www.lingatec.com.br